

DINOLift
Up to the Job



SELF-PROPELLED DINO®
DINO RXT Series


- Working heights 20.5 – 26.5 m
- Articulated, telescopic boom
- Lightweight rough terrain AWP

Standard features in all DINO RXT-models:

- Oscillating front axle
- 4WD, 2WS / 4WS / Crab steering (picture 1)
- Strong engine, excellent gradeability 35 %
- Great levelling capability (picture 2)
- Low ground pressure, no damage on the ground
- Quick operation, all functions from the basket

Options available for all DINO RXT-models:


- Electric motor for boom movements
- Automatic levelling
- Hydraulic generator 3.5 kW
- Turf tyres (picture 3)
- Air compressor
- Brackets for extra outrigger plates, for 600 x 600 x 25 mm plates
- LED working lights

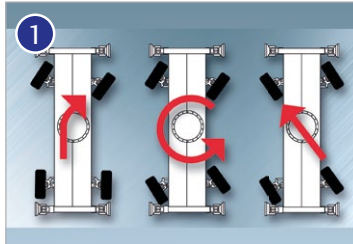


Technical data

	205RXT	240RXT	265RXT		205RXT	240RXT	265RXT
Max. working height	20.50 m	24.00 m	26.50 m	Steering, 2WS / 4WS / Crab	std	std	std
Max. platform height	18.50 m	22.00 m	24.50 m	Weight	4200 kg	4420 kg	4500 kg
Max. outreach	12.60 m	12.10 m	11.70 m	Four wheel drive	std	std	std
Support width	4.0 / 4.4 m	4.0 / 4.4 m	4.0 / 4.4 m	AC socket in the basket x 2	std	std	std
Lifting capacity	215 kg	215 kg	215 kg	Diesel power pack, Kubota 18.5 kW	std	std	std
Basket size	0.70 x 1.30 m	0.70 x 1.30 m	0.70 x 1.30 m	Electro motor	option	option	option
Boom rotation	cont.	cont.	cont.	Automatic levelling	option	option	option
Basket rotation	90°	90°	90°	Gradeability	35 %	35 %	35 %
Boom control	proport.	proport.	proport.	Drive speed	4.7 / 1.5 km/h	4.7 / 1.5 km/h	4.7 / 1.5 km/h
Transport length	5.85 m	6.65 m	7.17 m				
Transport width	1.99 m	1.99 m	2.11 m				
Transport height	2.29 m	2.27 m	2.41 m				


205RXT

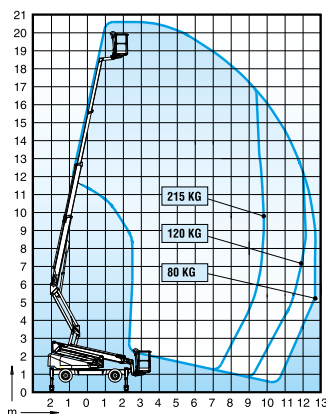

240RXT

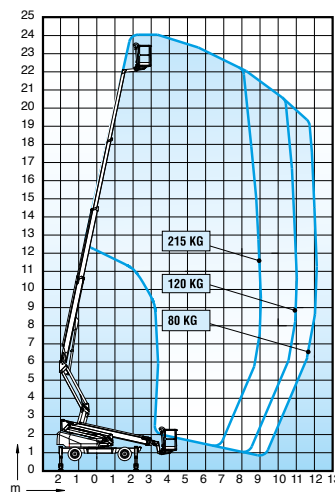

265RXT

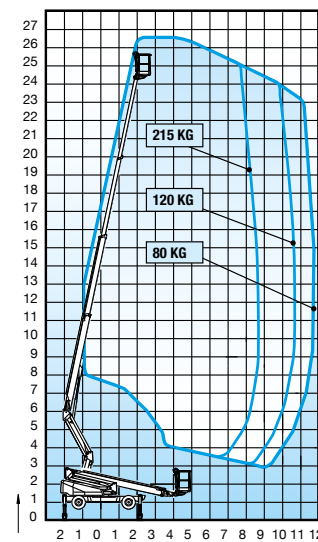

Technical specifications are subject to change without prior notice.

DINOLIFT

Up to the Job

Dinolift Oy
 Raikkolantie 145 • FI-32210 LOIMAA • FINLAND
 Tel. +358 (0)20 1772 400 • Fax +358 (0)2 76 27 160
www.dinolift.com