

TL34

TOWABLE BOOM LIFT



- Entry-level trailer mounted boom lift
- Lightweight and compact
- Easy to use hydraulic controls
- Simple and cost-effective to maintain
- Towable with most vehicles

 **snorkel**
www.snorkellifts.com

TOWABLE BOOM LIFT

TL34

DIMENSIONS TL34

Max. working height	12.1m
Max. platform height	10.1m
Max. working outreach	4.3m
Platform width (C)	1.2m
Platform depth (D)	0.8m
Outrigger footprint (A x B)	3.6m x 3.6m
Towing width (E)	1.59m
Towing length (F)	5.2m
Stowed height (G)	2.2m

PERFORMANCE



Platform capacity (SWL)	215kg
Max. wind speed	12.5m/s
Turret rotation (non-continuous)	360°
Wheels	165/80 R13
Controls	Full pressure hydraulic proportional

POWER


Power source	12V DC motor
Battery	2 x 6V 225Ah

WEIGHT

Weight	1,317kg
--------	---------

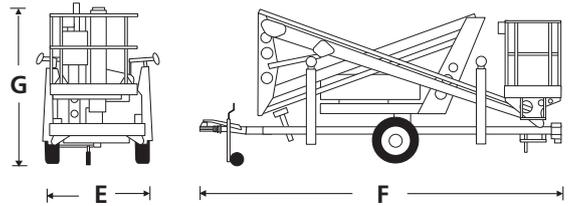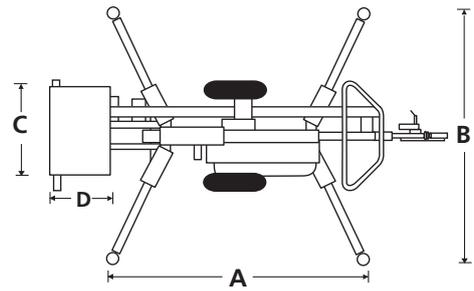

WORKING ENVELOPE

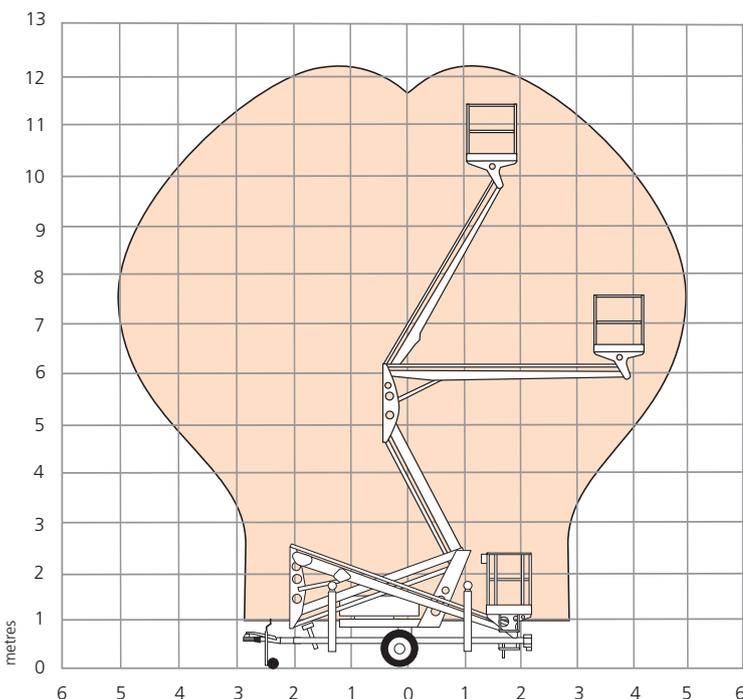

STANDARD FEATURES

- Manual fold-down outriggers
- Load sensing outrigger interlocks with LED indicators
- Power-save descent feature
- Proportional live hydraulic controls at platform
- Automatic reverse and over-run braking
- Integral road lighting
- Power line to platform
- Integrated automatic battery charger 110V-230V
- 2 year parts & labour, 5 year structural warranty
- CE approved

OPTIONS

- Special paint colours
- Flashing amber light
- Nylon spreader pads (set of 4)

snorkel www.snorkellifts.com

Vigo Centre, Birtley Road,
Washington, Tyne & Wear,
NE38 9DA, U.K.

t: +44 (0) 845 1550 057

e: sales@snorkellifts.com